


HARDWARE LOCATIONS — Doors and Frames with 4 (2 Pair) Hinges

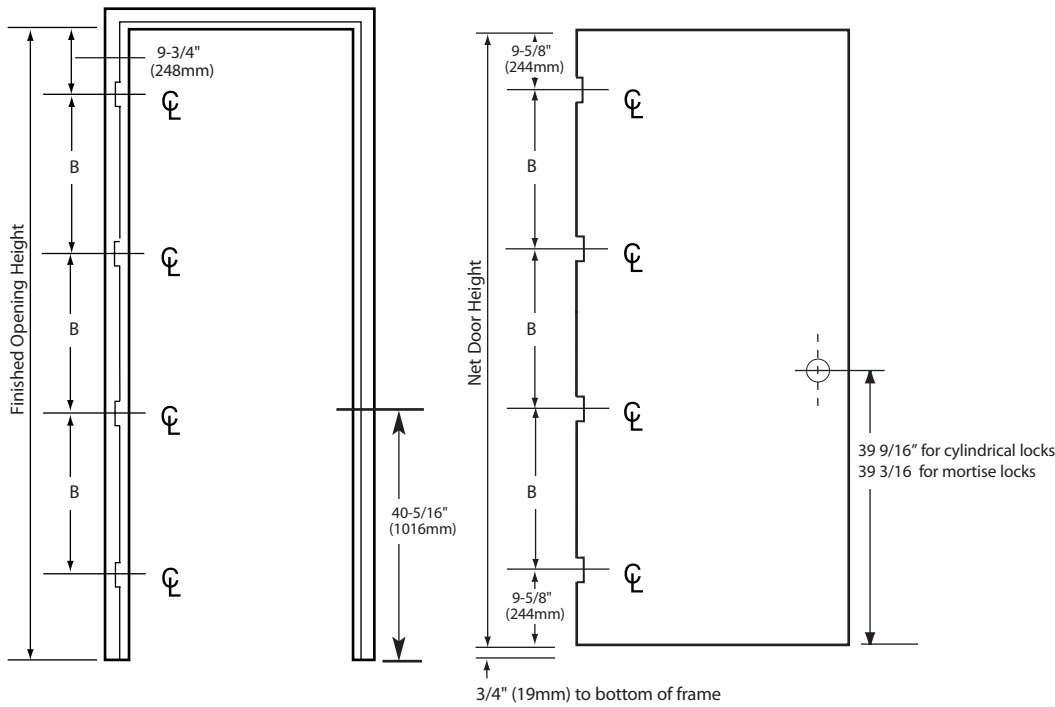

TYPICAL FRAME ELEVATION

TYPICAL DOOR ELEVATION

Chart 2

Door Opening Height	Dimension "B"
6'8" (2032mm)	19-61/64" (507mm)
7'0" (2134mm)	21-19/64" (541mm)
7'2" (2184mm)	21-61/64" (558mm)
7'6" (2286mm)	23-19/64" (592mm)
7'8" (2337mm)	23-61/64" (608mm)
7'10" (2388mm)	24-5/8" (625mm)
8'0" (2438mm)	25-19/64" (643mm)
8'2" (2489mm)	25-61/64" (659mm)
8'4" (2540mm)	26-5/8" (676mm)
8'6" (2591mm)	27-19/64" (693mm)
8'8" (2642mm)	27-61/64" (710mm)
8'10" (2692mm)	28-5/8" (727mm)
9'0" (2743mm)	29-19/64" (744mm)
9'2" (2794mm)	29-61/64" (761mm)
9'4" (2845mm)	30-5/8" (778mm)
9'6" (2896mm)	31-19/64" (795mm)
9'8" (2946mm)	31-61/64" (812mm)
9'10" (2997mm)	32-5/8" (829mm)
10'0" (3048mm)	33-19/64" (846mm)

NOTES:

- 4 hinges (2 pair) are standard on openings over 7'-6" in height and up to and including 10'-0" in height.
- Steelcraft standard locations - hardware preps (hinge and lock) with standard 3/4" undercut are located as illustrated above and as noted in chart 2.
- Special door undercuts - hardware locations shown from the bottom of the door will be adjusted accordingly. Locations will be held from the top of the door.
- Special door heights - Special door heights are available. Dimension "B" will vary accordingly.